

Div. of Scott Electric • 412-605-2992, #Direct

DUST CONTROL SAWS

Crack Chasing, Joint Saws Walk-Behind, Early Entry



Electric, Gas, Propane

 GorillaConcreteTools
 Multi-Use, Dust Control Concrete Saws

 95% Dust Containment
 Electric, Gasoline & Propane



Multii-Use Saws (2): Crack Chasing & Joint Sawing



#GCT-45

Please call for price

4.5" ELECTRIC, 120 Volt Crack Chasing, Decorative Sawing — Joint Saw ~ Grab' n Go, Very Productive


- 4.5" Blade Capacity, 2" Dust Port
- Depth-of-Cut: 3/4"
- Weight: 35 lbs.
- Incl. Metabo W9-115, 8-Amp Grinder
- Arbor size: 7/8"
- Impeccable dust control, radius cutting and blade visibility
- Wheels lock-in for straight-line sawing
- Vacuum Requirement: 150 CFM



#GCT-9 Please call for price

9" ELECTRIC, 120 Volt Crack Chasing & Joint Saw HD Versatility — Very Smooth & Productive Sawing

- 6" 9" Blade Capacity, 15° Bevel Angle
- Depth-of-Cut: 2-3/8"
- Weight: 70 lbs., 2" Dust Port
- Includes Metabo W24-230, 15-Amp Grinder
- Arbor size: 5/8"
- Impeccable dust control, depthengagement linkage & blade visibility
- · Wheels lock-in for straight-line sawing
- Vacuum Requirement: 250 CFM

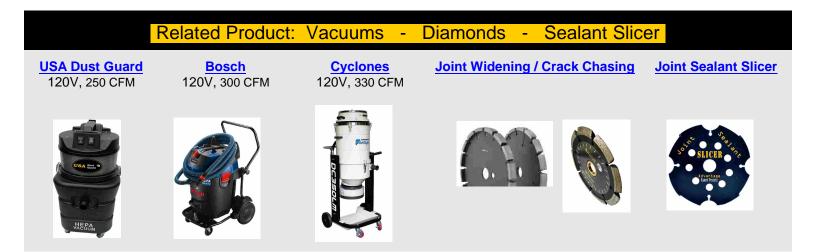



#GCT-8-II Please call for price



#GCT-XE Please call for price



#GCT-10XLP Please call for price

8" GASOLINE, Honda 5.5 HP

- 8" Blade Capacity, 2" Dust Port
- Depth-of-Cut: 2
- Weight: 125 lbs.
- Honda 5.5 HP Gasoline Engine
- Impeccable dust control, HD
 durability
- Blade Visibility: blade pointer plus cut-out window
- Compact, Portable, HD Depth & Engagement Linkage
- Arbor size: 5/8"
- Vacuum Requirement: 250 CFM

10" ELECTRIC, 240 Volt

- Impeccable dust control
- Front and rear blade pointers
- Cable depth adjustment
- Integrated wrench holders
- 1/4" steel frame
- Heavy duty bearings
- Dual drive belts
- 2 3" dust port
- Baldor 240 volt (Electric)
- 5.5 HP, 26 lb-ft peak torque
- Cutting Depth: 3"
- Arbor size: 7/8"
- Weight: 150 lbs.
- Vacuum Requirement: 250 CFM

10" PROPANE, Vanguard 9.5

- Impeccable dust control
- Patent Pending High-Efficiency dust box with blade sight window
- Centered lifting hook
- · Linkage-controlled front pointer arm
- · Quick blade depth adjustment
- Ergonomic handle
- Integrated Wrench holder
- 2" dust port

•

SPECIFICATIONS

- Engine: 9.5 HP Vanguard, 30 lb Tank - 4 times more HP vs. electric,
- EPS & CARB certified emissions monitoring
- Depth-of-Cut: 3", Weight: 305 lbs.
- Maximum Blade Diameter: 10"
- Arbor Size: 7/8"
- Vacuum Requirement: 250 CFM



#GCT-10 Please call for price



#GCT-X Please call for price



#SG-8 Please call for price

10" ELECTRIC, 120 Volt

- 8" 10" Blade Capacity, 2" Dust Port
- Depth-of-Cut: 2-1/4"
- Weight: 70 lbs.
- Incl Metabo W24-230, 15-Amp Grinder
- Simple to operate, impeccable dust control and depth-engagement linkage
- Blade Visibility: blade pointer plus cutout window
- · Compact, Portable, HD Built
- Arbor size: 5/8"
- Vacuum Requirement: 250 CFM
- · Power Requirement: 20 Amp Circuit

10" GASOLINE, Honda 11.7 HP

- · Impeccable dust control
- · Front and rear blade pointers
- Cable depth adjustment
- Integrated wrench holders
- 1/4" steel frame
- Heavy duty bearings
- Dual drive belts
- 2-3" dust port
- Honda GX-390 (Gas)
- 11.7 HP, 19.5 lb-ft peak torque
- Cutting Depth: 3"
- Arbor size: 7/8"
- Weight: 150 lbs.
- Vacuum Requirement: 250 CFM

SURFACE GRINDING / EDGING

8" ELECTRIC, 120 Volt

- Impeccable dust control
- Self-leveling head
- Fixed head for edge grinding
- 3-segment floating head taper lock system, Fast Change Diamond Tooling
- 3-point hold down
- · Built-in transport handles
- Built-in tool storage
- Wrench holder
- 2"dust port

SPECIFICATIONS:

- Power: 1.5 HP 120 volts
- Speed: 950 rpm
- Weight: 90 lbs.
- Head Pressure: 60 lbs.
- · Tool Driver Diameter: 8" Floating
- Arbor Size: 5/8-11

Early Entry / Green Concrete Cutting Saws (5) - 8" & 10"



#GS-100 Please call for price

Same lightweight as the Husqvarna 150 - that's the only similarity between the two saws — the GS-100 is superior in everyway.



#GCT-XEE Please call for price

#GS-300

Please call for price



- Impeccable dust control
- Green concrete skid plate
- Patent Pending dust box with blade sight window
- Quick blade depth adjustment
- Integrated Wrench holder
- Powder Coated Steel Frame
- Front and rear blade pointers

SPECIFICATIONS

- Engine: Honda GX200, 5.5 HP
- Cutting Depth: 2" maximum
- Blade sizes: 8" maximum
- Arbor size: 7/8"
- Weight: 108 lbs
- · Vacuum Port: 2" dust port
- Vacuum Requirement: 250 CFM

10" GAS, Honda 11.7 HP

- Impeccable dust control
- Green concrete skid plate
- · Front and rear blade pointers
- Cable depth adjustment
- Integrated wrench holders
- 1/4" steel frame
- Heavy duty bearings
- Dual drive belts
- (2) 3" dust ports

SPECIFICATIONS

- Honda GX-390 (Gas), 11.7 HP, 19.5 lb-ft peak torque
- Cutting Depth: 3" maximum
- Blade Size: 10" maximum
- Arbor size: 7/8"
- · Weight: 150 lbs
- Vacuum Port: (2) 3" dust ports

10" GAS, Honda 11.7 HP SELF-PROPELLED

- Impeccable dust control
- Green concrete skid plate
- Patent Pending High-Efficiency dust box with blade sight window
- Centered lifting hook
- Linkage-controlled front pointer arm
- Quick blade depth adjustment
- Ergonomic handle
- Integrated Wrench holder
- 2" dust port

#GCT-8EE Please call for price

Same price and quality as the GS-100 (left), but heavier-duty.



#GCT-XE Please call for price

8" GASOLINE, Honda 5.5 HP

- Impeccable dust control
- Green concrete skid plate
- 2 position control handle
- · Up cut blade rotation
- Quick blade depth adjustment
- · Integrated wrench holder
- Heavy Duty bearings
- · Wide wheels for Stability
- · Front and rear blade pointers

SPECIFICATIONS

- Honda GX200, 5.5 HP
- Cutting Depth: 2" maximum
- Blade Sizes: 8" maximum
- Arbor size: 7/8"
- Weight: 130 lbs.
- Vacuum Port: 2" dust port
- · Vacuum Requirement: 250 CFM

10" ELECTRIC, 240 Volt

- Impeccable dust control
- Green concrete skid plate
- Front and rear blade pointers
- Cable depth adjustment
- Integrated wrench holders
- 1/4" steel frame
- Heavy duty bearings
- Dual drive belts
- (2) 3" dust ports

SPECIFICATIONS

- Baldor 240 volt (Electric), 5.5 HP, 26
 Ib-ft peak torque
- Cutting Depth: 3" maximum
- Blade Size: 10" maximum
- Arbor size: 7/8"
- Weight: 150 lbs
- Vacuum Port: (2) 3" dust ports

EARLY ENTRY GREEN CONCRETE

Green Concrete Early Entry Blades

- Supreme Grade Green Concrete / Asphalt Blades
- ► Sizes: 4.5" 24"
- Arbors: 7/8" and 1"
 - < For pricing click here >

GS-300 - SPECIFICATIONS

Engine: Honda GX390. 11.7 HP

Maximum Blade Diameter: 10"

Engine Start: Recoil

Depth-of-Cut: 3"

Arbor Size: 7/8"

Weight: 305 lbs.

Vacuum Reg: 250 CFM

Drive: High Torque Electric
 Drive with Variable Speed