

# USA

## Dust Guard



Div. of Scott Electric • 800-388-2232, #2403

# 14" Power Cutter

## 2-Stroke, Only 19.6 lbs.

### 1-Year Warranty ~ "Can't Be Flooded"

Extremely Durable  
& Lightweight  
**Always Easy to Start**


Starts by the 3rd pull — even  
in sub-zero degree weather.

X-long filter life — *even with  
heavy use the filter is only  
changed every 6 months*

#EK6101: **\$869.00**

**\$360.00** — price with  
purchase of (10) 14" Segmented  
Turbo Blades + **FREE SHIPPING.**

### Segmented Turbo Blade:



#### Cured Concrete, Brick / Block

Thick, steel core provides greater  
stability and vibration dampening for  
straighter, truer cuts & long life.

Combination Segmented & Turbo +  
slanted segments optimizes life &  
speed under the most conditions for a  
very versatile performing blade.

Large, slanted gullets optimize debris  
and slurry removal for improved air  
circulation & heat dissipation - blade  
cuts smooth and lasts.

14" x .142 x 1"/20mm **\$115.00**  
#ST1414E



## 14" 61 cc Power Cutter

Model EK6101

STRATIFIED AIR SCAVENGING (SAS) SENDS AIR FLOW THROUGH THE TRANSFER PORT  
TO PUSH THE BURNED GASES THROUGH THE EXHAUST OUTLET RECOVERING 75% OF  
UNBURNED FUEL AND REDUCING FUEL CONSUMPTION BY 20%


- Cyclonic air Intake delivers more air, more efficiently and increases air filter life  
by discarding 90% of larger debris
- Larger surface inverted intake and filter system extends filter life and service  
intervals
- Start capacitor with spring assisted recoil stores electrical energy resulting in  
significantly less pull start force
- Sliding front engine mounts help absorb vibration by detaching when cutting  
pressure is applied

#### INNOVATION



Stratified Air Scavenging (SAS)  
recovers 75% of unburned fuel and  
reduces fuel consumption by 20%

#### PERFORMANCE



Cyclonic air Intake delivers more air,  
more efficiently and increases  
air filter life

#### COMFORT




Sliding front engine mounts help  
absorb vibration by detaching when  
cutting pressure is applied

#### CONVENIENCE



Smaller hub and drive wheel  
assembly increases maximum  
cutting depth to 5-1/8"

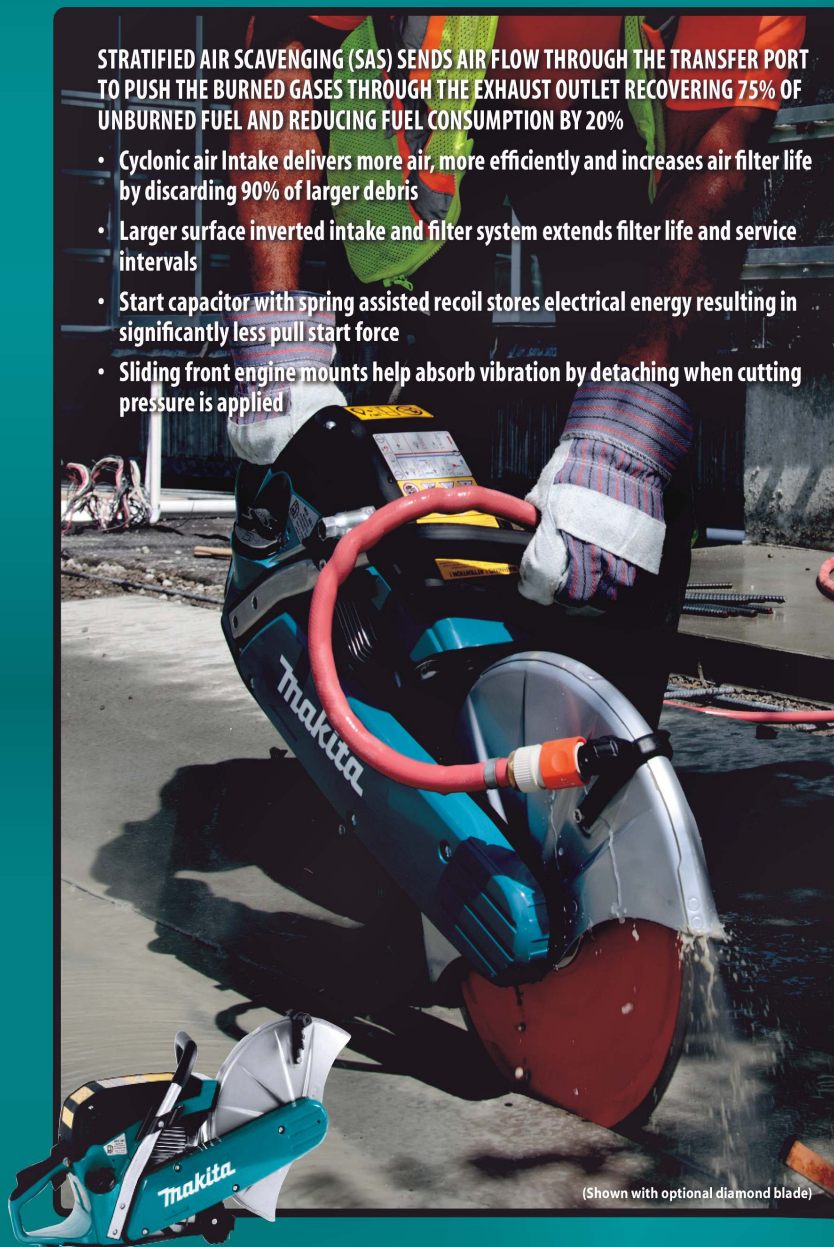

(Shown with optional diamond blade)

## COMPACT AND EFFICIENT POWER

**Saw Specs:** 50:1 Gas Oil Mix / 2-Cycle, 1" & 20mm Blade Clamp, Std. 5/8" Hose Connection, .75 Quart Fuel Tank