

USA

Dust Guard




Adhesive Anchoring 18 & 24 Month Shelf Life DeWalt / Powers

Div. of Scott Electric • 412-605-2992 (Direct)

Maximum Quality
Cost Effective Dispensing
Dispense Exact Amount

Eliminate Dispensing Waste
Optimize Production

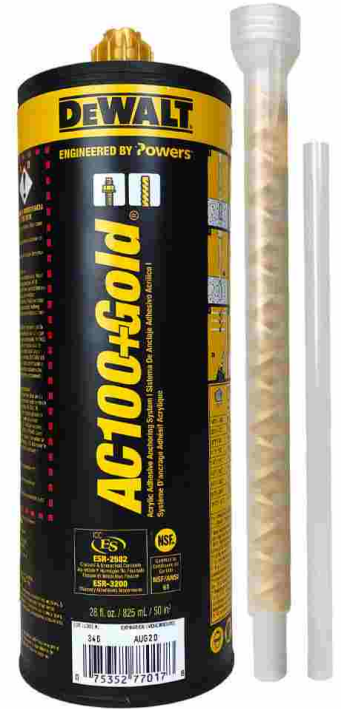

**AC100+GOLD
&
Cordless Dispenser**



**Cordless Battery Dispenser
Prevents Material Waste & Dripping**

Features:

- 20V MAX** battery system
- DOSAGE DIAL** controls the amount of adhesive to be dispensed
- SPEED DIAL** controls the flow rate of the adhesive being dispensed

**AC100+ GOLD Adhesive
DOT APPROVED 28 STATES**

Features:

- 18 MONTH SHELF LIFE**
- ICC-ES APPROVED** for cracked & un-cracked concrete, grouted or hollow masonry, brick, stone, unreinforced masonry
- SEISMIC APPROVED** for seismic design categories A-F
- CERTIFIED TO NSF/ANSI 61** drinking water system components
- VERSATILE** > low odor > fast cure times

Product Information - Next Page

AC100+ GOLD

Contractor Price



[Estimator - Click Here](#)



AVAILABLE: CORDLESS BATTERY DISPENSER FOR DOSAGE CONTROL

Eliminates Air Hose & Compressor, Pre-Set Injection Amount, Prevents Dripping, Operator Error & Fatigue, Improves Production.

AC100+ GOLD **DOT APPROVED, ALL STATES:** [Bulletin 15, Section 516.2\(k\) - Concrete Pavement Patching, Anchoring Concrete, Grout-Filled & Hollow CMU, Solid/Hollow Brick, Stone, Clay, Crack Concrete, Seismic, Drinking Water](#)

ICC-ES Approved Concrete
Vynylester - 10:1

- Anchor Size Range: 3/8" - 1.5" threaded rod, #3 - #10 rebar
- Permissible Installations: dry concrete, water-saturated (wet), water-filled holes
- 18 month shelf life
- Provides greatest temperature range to anchor into, from 14°F to 104°F (base material)
- Suitable for all year use, cures at base material temperatures down to 14°F
- Reference value for working (gel) and cure times: 6 minutes / 45 minutes with *base material @ 68° F*
- Provides longest working time with a fast cure for greater flexibility during installation.

PART NUMBER	DESCRIPTION	PRICE EA	BOX QTY	PALLET QTY
8478SD	10 oz, 1:1 cartridge	Please Call	12	648
08479	Dispenser, Manual - HP	for Pricing	1	
08437	Dispenser, Manual		Free w 36 tubes	
DCE560D1	Dispenser, Battery		Free w72 tubes	
8490SD	28 oz, 10:1 dual cartridge		8	240
08494	Dispenser, Manual, 10:1, 28 oz		Free w 72 tubes	
DCE595D1	Dispenser, Battery, 10:1, 28 oz		Free w 144 tubes	
08293	Extra Mixing Nozzle for 10 oz cartridges		12	24
08294	Extra Mixing Nozzle with 8" Extension for 28 oz cart.		12	24

AC200+ **Concrete, Grout-Filled CMU, Solid Brick, Crack Concrete, Seismic, Drinking Water**

ICC-ES Approved Concrete
Acrylic - 1:1 & 10:1

- Anchor Size Range: 3/8" - 1.5" threaded rod, #3 - #10 rebar
- Permissible Installations: dry concrete, water-saturated concrete (wet)
- 18 month shelf life
- Suitable for all year use, cures at base material temperatures down to 23°F
- Reference value for working (gel) and cure times: 3 minutes / 30 minutes with *base material @ 68° F*
- Provides long working time with a fast cure for greater flexibility during installation.

PART NUMBER	DESCRIPTION	PRICE EA	BOX QTY	PALLET QTY
PFC1271050	10 oz, 1:1 cartridge Quik-Shot	Please Call	12	648
08437	Dispenser, Manual, 1:1 Quik-Shot	for Pricing	Free w 36 tubes	
08479	Dispenser, Manual, 1:1 HP Quik-Shot			
DCE560D1	Dispenser, Battery, 1:1, Quik-Shot *		Free w72 tubes	
PFC1271150	28 oz, 10:1 dual cartridge		8	240
08494	Dispenser, Manual, 10:1, 28 oz		Free w72 tubes	
DCE595D1	Dispenser, Battery, 10:1, 28 fl oz *		Free w 144 tubes	
PFC1641600	Extra Mixing Nozzle with 8" Extension		2	24

PURE110+
 ICC-ES Approved
 Concrete
 Epoxy - 1:1 & 3:1

Concrete, Grout-Filled/Hollow CMU, Solid/Hollow Brick, Stone, Clay, Crack Concrete, Seismic, Drinking Water

- Anchor Size Range: 1/4" - 2" threaded rod, #3 - #10 rebar
- Permissible Installations: dry, water-saturated (wet), water-filled holes, underwater
- 24 month shelf life
- Reference value for working (gel) and cure times: 25 minutes / 8 hours with base material @ 68° F.

PART NUMBER	DESCRIPTION	PRICE EA	BOX QTY	PALLET QTY
08310SD	9 fl oz, 1:1 mix ratio, Quik-Shot	Please Call	12	432
08437	Dispenser, Manual, 1:1 Quik-Shot	for Pricing	Free w 36 tubes	
08479	Dispenser, Manual, 1:1 HP Quik-Shot			
DCE560D1	Dispenser, Battery, 1:1 Quik-Shot *		Free w72 tubes	
08313SD	13 fl oz, 3:1 mix ratio	Please Call	12	40
08298	Dispenser, Manual, 3:1, 13 oz	for Pricing	Free w72 tube	
DCE593D1	Dispenser, Battery, 3:1, 13 oz *		Free w 144 tubes	
08321SD	21 fl oz, 1:1 mix ratio	Please Call	12	540
08409	Dispenser, Manual, 1:1, 21 oz	for Pricing	Free w72 tubes	
08421	Dispenser, Manual, 1:1, 21 oz - HP		1	
DCE591D1	Dispenser, Battery, 1:1, 21 oz *		Free w 144 tubes	

PURE50+
 ICC-ES Approved
 Concrete
 Epoxy - 1:1

Concrete, Grout-Filled CMU, Solid Brick/Stone, Crack Concrete, Seismic, Drinking Water

- Anchor Size Range: 3/8" - 1.25" threaded rod, #3 - #10 rebar
- Permissible Installations: dry, water-saturated (wet), water-filled holes
- 24 month shelf life
- Reference value for working (gel) and cure times: 25 minutes / 8 hours with base material @ 68° F.

08600	9 oz, 1:1 cartridge Quik-Shot	Please Call	12	432
08437	Dispenser, Manual, 1:1 Quik-Shot	for Pricing	Free w 36 tube	
08479	Dispenser, Manual, 1:1 Quik-Shot - HP		1	
DCE560D1	Dispenser, Battery, 1:1, Quik-Shot *		Free w72 tubes	
08605	21 oz, 1:1 dual cartridge	Please Call	12	540
08409	Dispenser, Manual, 1:1, 21 oz	for Pricing	Free w72 tubes	
08421	Dispenser, Manual, 1:1, 21 oz - HP		1	
DCE591D1	Dispenser, Battery, 1:1, 21 oz *		Free w 144 tubes	
08294	Extra Mixing Nozzle with 8" Ext, 21 oz	Please Call	2	24
08609	Extra mixing nozzle with 8" extension, 9/51 oz cart.	for Pricing	2	24

PLASTIC & STAINLESS
 STEEL SCREENS & PLUGS
 — ALL AVAILABLE, CALL FOR PRICING

REPLACEMENT BATTERIES: 276717 | DCB203 - 2.0 Ah Please Call
 611961 | DCB200 - 3.0 Ah for Pricing
 442372 | DCB205 - 5.0 Ah